


ITEM	QTE	# PIECE	DESCRIPTION
1	4	ELEWIR0121	SOOW3C16 = FIL ELECTRIC WIRE 16/3 per ft
2	1	ELECON0021	(#15-730) = 7 WAY PLUG, W/CABLE GUARD
3	1	LITUTL0146	ABS Amber Beacon Light Fixed, 12V Low dome

Notes:

- 12.8V input Voltage +/- 20%
- 1A peak current
- 0.4A Average current
- 75 flashes/minute
- Clearance (BRN) lights must be ON to power the system
- Conformes to SAE J845 standard
- If the White/black wire is connected, the strobe will change flashing pattern everytime it is plugged in

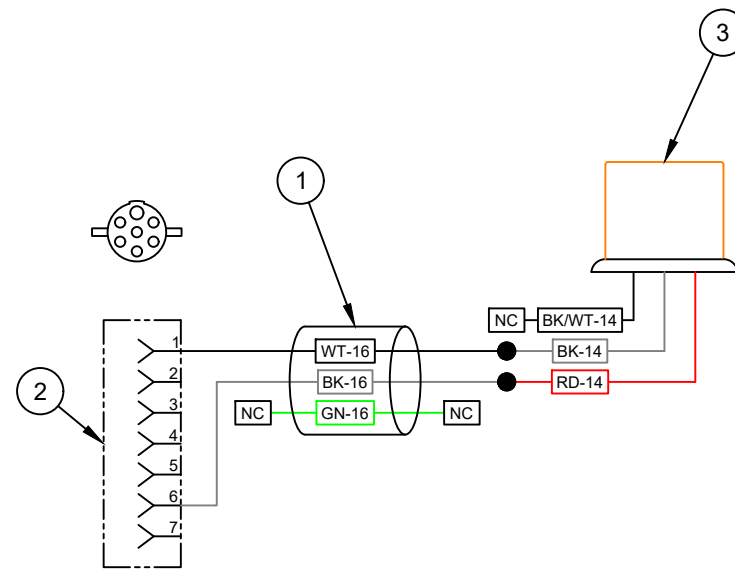

Color Codes 7 Way Connection (SAE J560)			Symbol Legend	
WT	White	Ground return to towing vehicle		
BK	Black	Clearance, side marker and identification lamps (May be Optional)		
YL	Yellow	Left (R/S) turn signal and hazard lamps		
RD	Red	Stop lamps and antilock braking system (ABS) (secondary power)	●	Junction
GN	Green	Right (C/S) turn signal and hazard lamp	NC	No Connection
BN	Brown	Tail and license plate, clearance and/or side marker lamps	→	Connector
BL	Blue	Continuous ABS primary power/auxiliary devices		Outlines and enclosure


TEMISKO (1983) INC.
 91 RUE ONTARIO, NOTRE-DAME-DU-NORD, PQ, J0Z 3B0

Beacon light

Fichier :
 DESS.: PC Date: 22-02-04

Schematic :
SH0003